



SJ SERİSİ HİDROLİK DÖNER BAĞLANTI REKORLARI

SJ Serisi Hidrolik Döner Bağlantı Rekorları, hareketli bir hortumda dönmeden kaynaklanan burkulma ve bükülmeyi gidererek zarar görmesini engellemek amacıyla hortumla sabit bir bağlantı parçası arasına monte edilirler.

SJ Serisi Hidrolik Döner Bağlantı Rekorları, hızlı ve sürekli dönüşler için uygun olmayıp, yüksek basınç altındaki yavaş dönüşler için uygundur.

SJ Serisinde gövdeler ısıtılma işlemiyle sertleştirilmiştir.



Malzeme

Vida Ölçüsü

Sızdırmazlık

Çalışma Sıcaklığı

Kaplama

Isıl İşlem

Özel Hallerde

Kullanım Alanı

Otomat Çeliği

BSP (İsteğe Bağlı: NPT, Metrik)

Nitril O-ring (NBR)

-30 °C ile +110 °C

Galvaniz (Chrome III pasivasyon)

Komple

VİTON

İnşaat, üretim, mobil hidrolik, genel endüstri

SJ SERIES HYDRAULIC SWIVEL JOINTS

SJ Series Hydraulic Swivel Joints are mounted between the end of a moving hose and a fixed component to prevent hose's damaging by compensating its torsion and twisting.

SJ Series Hydraulic Swivel Joints are not suitable for fast and permanent rotations. They are suitable for slow rotations and high pressure applications.

Bodies of SJ Series Hydraulic Swivel Joints are hardened by heat treatment.



Material

Thread Size

Sealing

Working Temperature

Plating

Head Treatment

Upon Request

Applications

Carbon Steel

BSP (Upon Request: NPT, Metric)

Nitrile O-ring (NBR)

-30 °C and +110 °C



Zinc Plating (Cr III Passivation)

Through Hardening

VITON & High temperature resistant special spring
(-30 °C & +225 °C)



Construction, production, mobile hydraulic,
general industries



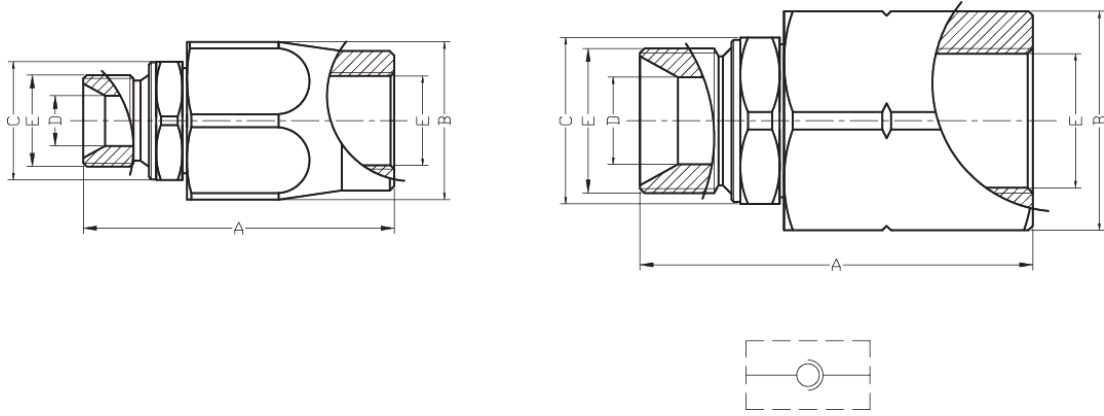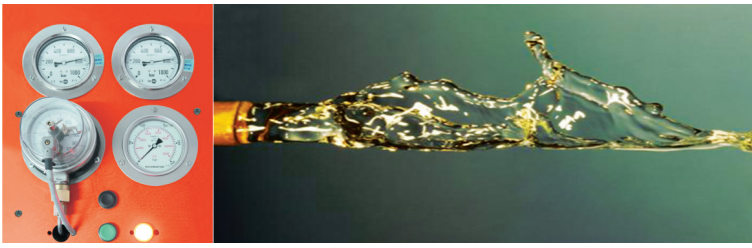

Teknik Özellikler Technical Specifications

Kod (Code)	Vida Ölçüsü (Thread Size) E	Çalışma Basıncı (Working Pressure) Bar	Ölçüler - mm (Dimensions) - mm			
			A	B	C	D
SJIG14N	1/4" BSP	450 Bar	61,50	30	19	6
SJIG38N	3/8" BSP	430 Bar	67	32	24	8,50
SJIG12N	1/2" BSP	400 Bar	72	36	27	11,50
SJIG34N	3/4" BSP	380 Bar	81	46	36	15
SJIG1N	1" BSP	340 Bar	91	50	38	19,50

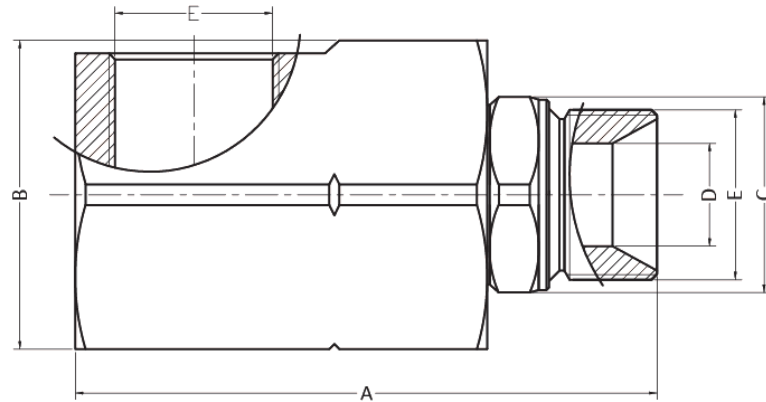

Teknik Özellikler Technical Specifications

Kod (Code)	Vida Ölçüsü (Thread Size) E	Çalışma Basıncı (Working Pressure) Bar	Ölçüler - mm (Dimensions) - mm			
			A	B	C	D
SJ90G14N	1/4" BSP	450 Bar	69	32	19	6
SJ90G38N	3/8" BSP	430 Bar	77	36	24	8,50
SJ90G12N	1/2" BSP	400 Bar	87,50	41	27	11,50
SJ90G34N	3/4" BSP	380 Bar	101	55	36	15
SJ90G1N	1" BSP	340 Bar	113	60	38	19,50